

S9M


Force Transducer

Special features


- Tensile/compressive force transducer
- Accuracy class 0.02
- Hermetically encapsulated (IP68)
- Rust-resistant materials
- Available in different cable lengths and with connector mounted on request
- TEDS on request



Principle of the S9M force transducer

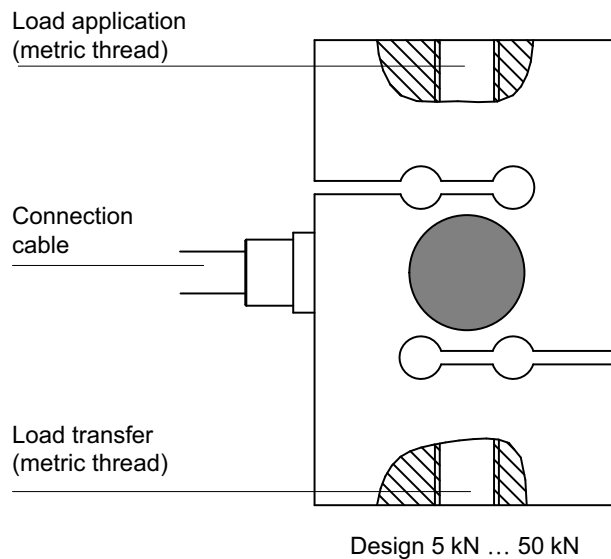


Dimensions

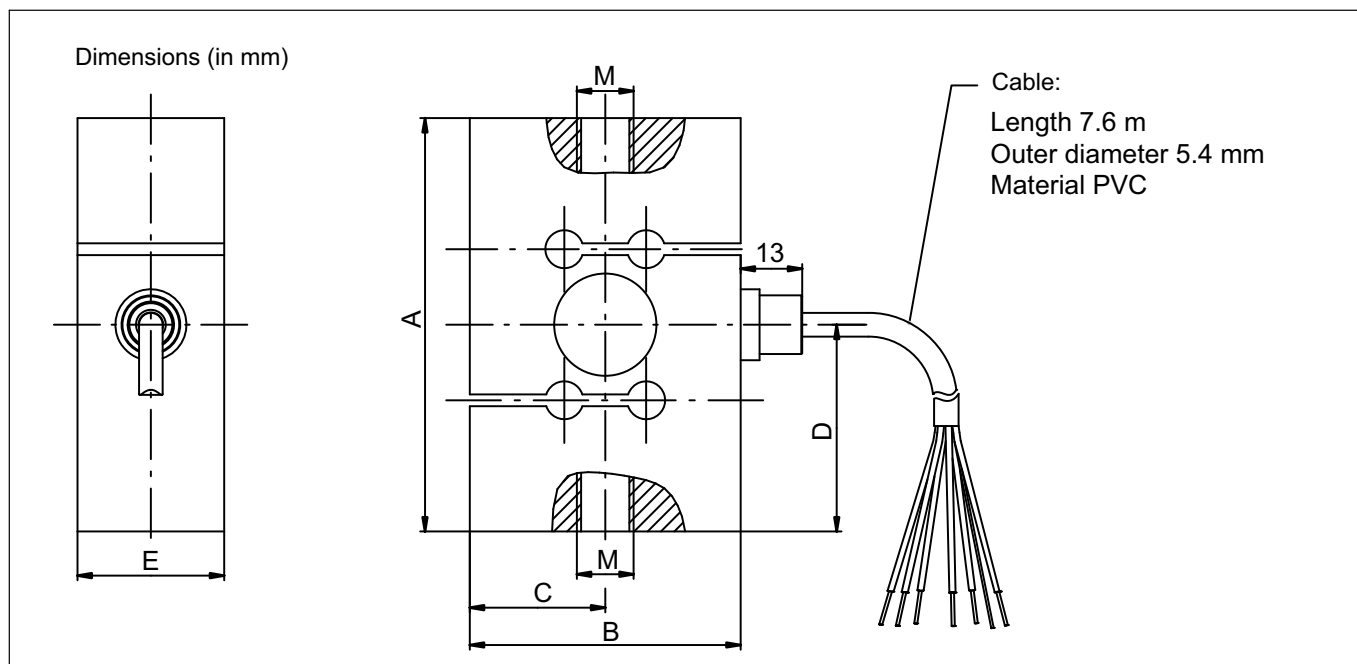

Type	A	B	C	D	E	M
S9M/500 N	62	50.8	25.4	31	24	M8
S9M/1 kN	62	50.8	25.4	31	24	M8
S9M/2 kN	87.3	57.2	28.6	43.7	24	M12
S9M/5 kN	87.3	57.2	28.6	43.7	31	M12
S9M/10 kN	87.3	57.2	28.6	43.7	31	M12
S9M/20 kN	100	69.8	34.9	50	31	M24x2
S9M/50 kN	100	76.2	38.1	50	36.5	M24x2

Mounting accessories

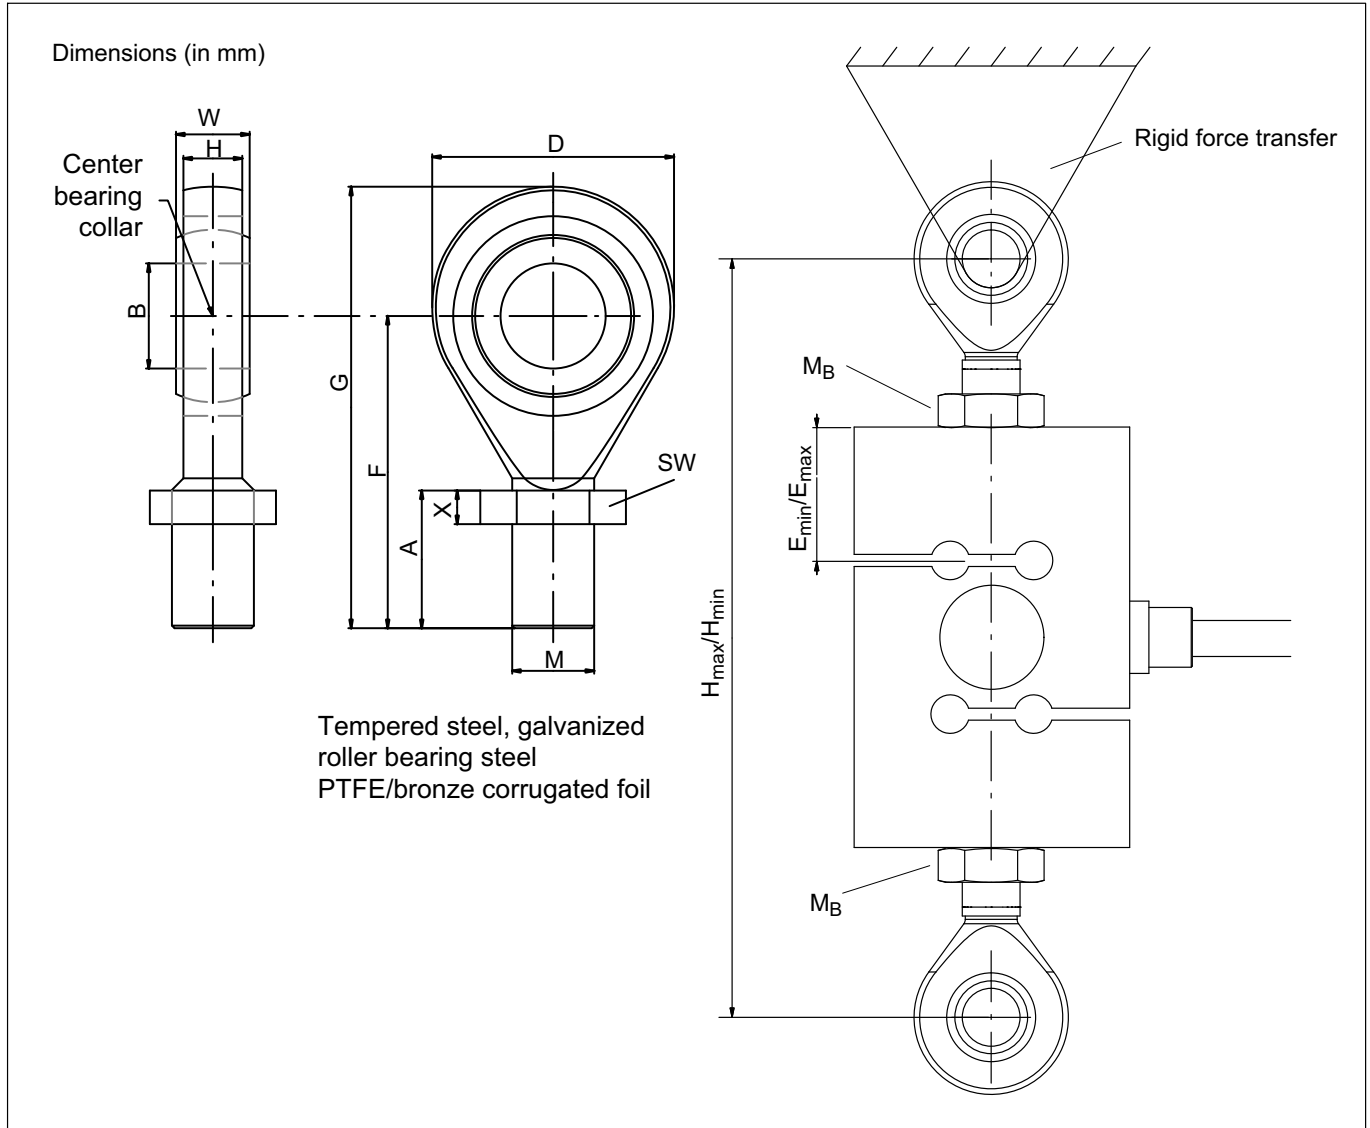

Nominal (rated) force:	Knuckle eye	Weight (kg)	A	$\varnothing B$ H7	D	F	G	H	M	W	X	SW
0.5 kN ... 1 kN	1-U1R/200KG/ZGW	0.05	16.5	8	24	32	44	9	M8	12	6.5	13
2 kN ... 10 kN	1-U2A/1T/ZGUW	0.1	33	12	32	54	70	12	M12	16	7	19
20 kN ... 50 kN	1-U2A/5T/ZGUW	0.4	57	25	60	94	124	22	M24x2	31	10	36


Nominal (rated) force:	Knuckle eye	H_{min}	H_{max}	E_{min}	E_{max}	M_B (N·m)
0.5 kN	1-U1R/200KG/ZGW	110	118	4	8	15
1 kN	1-U1R/200KG/ZGW	110	118	4	8	15
2 kN	1-U2A/1T/ZGUW	156	174	11	20	50
5 kN	1-U2A/1T/ZGUW	158	174	11	19	50
10 kN	1-U2A/1T/ZGUW	158	174	11	19	50
20 kN	1-U2A/5T/ZGUW	231	263	13	29	200
50 kN	1-U2A/5T/ZGUW	241	265	12	24	500

Specifications

Type			S9M						
Nominal (rated) force:	F_{nom}	kN	0.5	1	2	5	10	20	50
Accuracy									
Accuracy class			0.02						
Relative reproducibility and repeatability errors without rotation	b_{rg}	%	0.02						
Rel. reversibility error	v		0.02						
Non-linearity	d_{lin}		0.02						
Relative creep	d_{crf+E}		0.02						
Temperature effect on sensitivity	TC_S	% / 10K	0.02						
Temperature effect on zero signal	TC_0		0.02						
Electrical characteristics									
Nominal (rated) sensitivity	C_{nom}	mV/V	2						
Relative zero signal error	$d_{s,0}$	%	5						
Sensitivity error	d_c		0.25						
Tensile/compressive sensitivity variation	d_{zd}		0.1						
Input resistance	R_i	Ω	389 ± 15						
Output resistance	R_o		350 ± 1.5						
Insulation resistance	R_{is}	Giga Ω	> 2						
Operating range of the excitation voltage	$B_{u,gt}$	V	0.5...12						
Reference excitation voltage	U_{ref}		5						
Connection			6-wire circuit						
Temperature									
Reference temperature	T_{ref}	°C	+23						
Nominal temperature range	$B_{t,nom}$		-10...+70						
Operating temperature range	$B_{t,g}$		-30...+85						
Storage temperature range	$B_{t,s}$		-30...+85						
Characteristic mechanical quantities									
Maximum operating force	F_G	% of F_{nom}	150						
Force limit	F_L		150						
Breaking force	F_B		200	300			200		
Limit torque	$M_{G,perm}$	Nm	25	50	90	150			
Static lateral limit force	F_q	% of F_{nom}	10						
Nominal (rated) displacement	s_{nom}	mm	0.35	0.4	0.35	0.1	0.2	0.2	0.4
Fundamental frequency	f_G	kHz	0.6	0.9	1	1.7	2.1	2.3	2.5
Relative permissible oscillatory stress	F_{rb}	% of F_{nom}	100						70
General information									
Degree of protection per EN 60529			IP68 (test condition 1 m water column / 100 hours)						
Spring element material			Stainless steel in accordance with EN 10088-1						
Measuring point protection			Hermetically welded enclosure						
Cable			6-wire cable, PVC insulation						
Cable length	m		7.6 m (standard), also available: 1.5 m; 3 m and 6 m						

Cable assignment (6-wire configuration)

With this cable assignment, the output voltage at the measuring amplifier is positive in the pressure direction when the transducer is loaded.

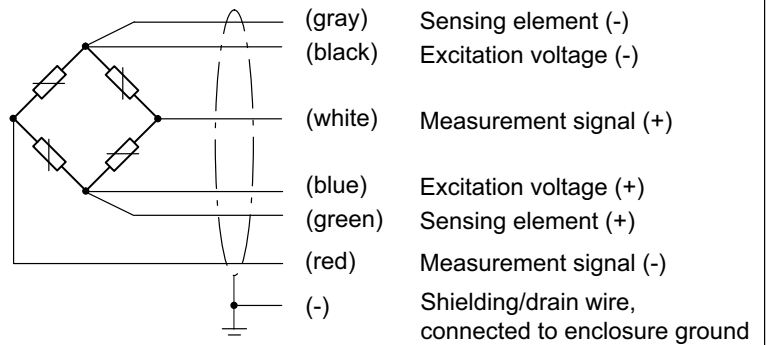

Versions and ordering numbers

Code	Measuring range	Stock item ordering number	The ordering numbers shown in gray are preferred types. They can be delivered rapidly.
500N	500 N	1-S9M/500N-1	All preferred types with 7.6 m cable, open ends and without TEDS.
001K	1 kN	1-S9M/1kN-1	
002K	2 kN	1-S9M/2kN-1	The ordering number for the preferred types is 1-S9M/xxxN-1
005K	5 kN	1-S9M/5kN-1	The ordering number for customer-specific designs is K-S9M-Mont
010K	10 kN	1-S9M/10kN-1	
020K	20 kN	1-S9M/20kN-1	
050K	50 kN	1-S9M/50kN-1	

Cable length	Plug	Transducer identification
01M5 1.5m	Y Free ends	S Without TEDS
03M0 3m	F D-Sub (for Scout 55, many MGC+s, etc.)	T With TEDS
06M0 6m	Q Sub-HD (for many Quantum modules)	
07M6 7.6 m	N ME3106PEMV	
	P CON P1016 (for industrial amplifiers of the Somat XR series)	

K-S9M-MONT	010K	03M0	Q	T
-------------------	-------------	-------------	----------	----------

The example above shows an S9M with 10kN capacity, 3 m cable, a fitted plug for the Quantum system, and TEDS.

TEDS is only possible when a plug is fitted. TEDS and open ends cannot be combined.

Subject to modifications.
All product descriptions are for general information
only. They are not to be understood as a guarantee
of quality or durability.

Hottinger Baldwin Messtechnik GmbH
Im Tiefen See 45 · 64293 Darmstadt · Germany
Tel. +49 6151 803-0 · Fax +49 6151 803-9100
E-mail: info@hbm.com · www.hbm.com

measure and predict with confidence

